


# 12-36

Our 12-36 profile is the panel of choice for industrial and commercial metal roofing and siding applications, and is an excellent choice for pre-engineered buildings. This profile provides the strength and durability to withstand the toughest conditions and is ideal for slopes as low as 1/12. Our panels are cut to custom lengths up to 45' and provide a 36" coverage.



- Available in 26ga, 24ga available on special order
- Custom lengths up to 45'
- Galume or Pre-Painted finish available, 26 colours to choose from
- Easy to install, can be installed over existing roofing material
- Built to withstand heavy snow loads

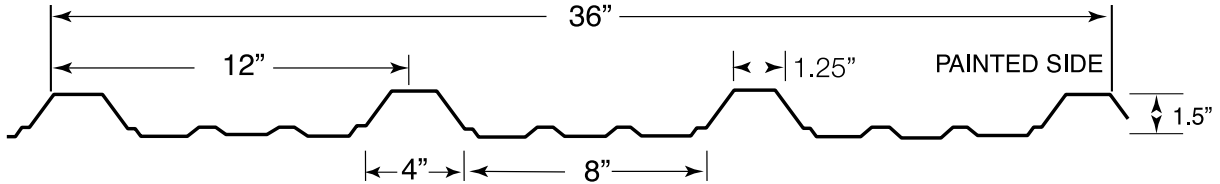


## Specification Data

- Exposed fastener
- 3' to 45' custom lengths
- 36" coverage
- 1.5" trapezoidal ribs on 12" centres
- Minimum roof slope 1/12
- Snow loads and metal specs on back of page



**12-36 LOAD TABLE**

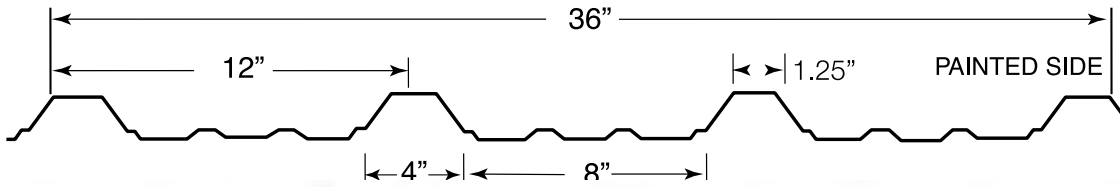

Base Steel Thickness	Weight (psf)	Section Modulus (in <sup>3</sup> )		Moment of Inertia Mid-span (in <sup>4</sup> )
		Mid-span	Support	
24Ga (0.024 in.)	1.10	0.079	0.089	0.088
26Ga (0.019 in.)	0.87	0.063	0.071	0.070

Load Table		Maximum Specified Uniformly Distributed Loads in psf					
		1-Span		2-Span		3-Span	
Span (ft.)		24Ga.	26Ga.	24Ga.	26Ga.	24Ga.	26Ga.
2'-0"	S	421	336	479	383	512	409
	D	947	757	2282	1823	2282	1823
3'-0"	S	187	150	213	170	228	182
	D	281	224	676	540	676	540
3'-6"	S	137	110	157	125	167	134
	D	177	141	426	340	426	340
4'-0"	S	105	84	120	96	128	102
	D	118	95	285	228	285	228
4'-6"	S	83	66	95	76	101	81
	D	83	66	200	160	200	160
5'-0"	S	67	54	77	61	82	65
	D	61	48	146	117	146	117
5'-6"	S	56	44	63	51	68	54
	D	46	36	110	88	110	88
6'-0"	S	47	37	53	43	57	45
	D	35	28	85	68	85	68
6'-6"	S	40	32	45	36	48	39
	D	28	22	66	53	66	53
7'-0"	S	34	27	39	31	42	33
	D	22	18	53	43	53	43
7'-6"	S	30	24	34	27	36	29
	D	18	14	43	35	43	35
8'-0"	S	26	21	30	24	32	26
	D	15	12	36	28	36	28

S = Maximum Load for Strength.

D = Maximum Load For Deflection (span/180)

This Load Table prepared by Inkpen Engineering Ltd. Loads are based on ASTM A792 Grade 50 Steel (F<sub>y</sub>=50ksi). Live Load Factor = 1.4

The information contained here is intended as a guideline only. Consult the National Building Code of Canada and/or local codes if more detailed analysis is required.

Web crippling not included in strength values