



VersaFrame inc. is proud to offer the following roofing and siding accessories to help finish your project.

Visit our website for links to installation videos for all of the accessories we carry.

- Metal to Wood Fasteners
- Metal to Metal Fasteners
- Foam Closures
- Vented Closures
- Ridge Ventilation Products
- Expandable Foam Tape

- Butyl Tape
- Metal Roof Caulking
- Synthetic Underlayment
- Pipe Flashing
- PVC/Polycarbonate panels
- Turboshears

Items stocked at Nisku can be shipped to your nearest manufacturing location





Our line of metal to wood fasteners are designed to provide superior holding strength when attaching metal roofing and siding to wood frames and plywood. Wood fasteners are widely used for agricultural and residential metal roofing and siding applications, and come in various head sizes, thread widths and lengths.

In-stock Sizes/Colours



Thread/Length	Head	Min. Qty	Approx. Weight (lbs)/M	Stocked Colors	Stocked Locations
10 x 1-1/2"	1/4" HWH	250	10	All	All
10 x 2"	1/4" HWH	250	12.5	Common	Call for availability
14 x 1-1/4"	3/8" HWH	250	17.5	All	All
14 x 2"	3/8" HWH	250	24	Common	Call for availability
17 x 1-1/4" (Goof)	3/8" HWH	250	28	Plain	Nisku
10-9 x 1-1/8"	Pancake	250	N/A	Plain	Nisku
8 x 1"	Wafer	250	N/A	Plain	Nisku

Custom Order Sizes (1-3 week lead time)

10 x 1" to 3"	1/4" HWH	500
14 x 1" to 3"	3/8" HWH	500

All fasteners with exception to Pancake and Wafer screws include a neoprene washer.

Call your nearest manufacturing/sales location for stock and availability

* Product Specification/Testing Data is available upon request





In addition to our wood fasteners we can provide various sizes of metal to metal fasteners designed for superior holding strength when attaching metal roofing and siding to a wide variety of steel frames.

> Call your nearest manufacturing/sales location for stock and availability

In-stock Sizes/Colours



Size	Head	Min. Qty	Approx. Weight (lbs)/M	Stocked Colors	Stocked Locations
1/4-14 x 1"	3/8" HWH	500	15	All	Call for availability
1/4-14 x 1.5"	3/8" HWH	500	20	All	Call for availability
14-14 x 7/8" (Lap)	3/8" HWH	500	14	All	Call for availability
12-14 x 1"	Pancake	500		Plain	Nisku
8 x 1"	Wafer	500		Plain	Nisku

Custom Order Sizes (1-3 week lead time)

1/4-14x1.25" to 5"	3/8" HWH	500
1/4-12x1" to 5"	5/16" HWH	500
14-14 x 7/8" (Lap)	5/16" HWH	500

All fasteners with exception to Pancake and Wafer screws include a neoprene washer.





* Product Specification/Testing Data is available upon request

Pancake Tek





Standard Foam Closure

VersaFrame Inc. offers a full line of polyethylene foam closures to fit our metal roofing and siding profiles. Closures come in 3' lengths to fit our panel widths.

- Used to close openings created by metal panel flutes and flashings.
- Large Tab closures include a full 1/4" bead of adhesive for easy installation.
- High UV resistance and excellent durability

Part/Profile	Length
LP 9-36 Vented LT	36"
LP 12-36 Vented LT	36"

Part/Profile	Length
9-36 LT & ST	36"
12-36 LT & ST	36″
Diamond Rib LT & S	T 36″
Low Rib LT & ST	36"
7/8" Corrugated	36″

Ventilated Foam Closure

VersaFrame Inc. offers vented ridge closures for our 9-36 and 12-36 profiles. Like our standard closures, vented closures come in 3' lengths.


- Keeps bugs, water & snow out while allowing air through.
- Helps remove heat and moisture, preventing rot, mold growth, and ice damming while limiting condensation build up.

^{*} Product Specification/Testing Data is available upon request





Ridge/Fascia Ventilation Products

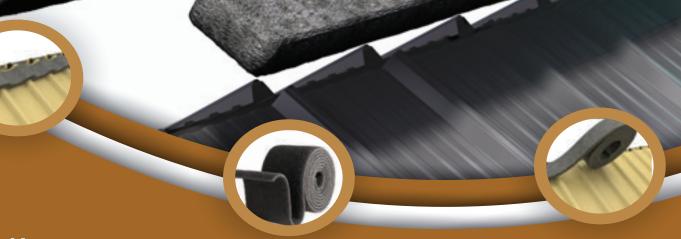

Flex-O-Vent

Flex-O-Vent is a ridge ventilation product that comes in flexible, 10' rolls, made from the same product as the LP Vented closure. It's durability and easy installation make it an excellent choice for ventilating your building.

- Won't absorb moisture
- Prevents insect, animal and snow infiltration
- Easy rollout installation

Part	Height	Width	Length
Python	3/4"	8″	20′
Python	3/4"	10.5″	20′
Python	3/4"	11.75″	20′
Fascia Vent	1″	3″	50′

* Two rolls 10' rolls per box

Part	Height	Width	Length	Optimal for Rib Heights
Flex-O-Vent 1	.5/3 1.5"	3″	120″	Up to 1-1/4"
Flex-O-Vent 1	.5/2 1.5"	2"	120″	Up to 1-1/4"
Flex-O-Vent 1	/3 1″	3″	120″	Up to 3/4"
Flex-O-Vent 1	/2 1"	2"	120″	Up to 3/4"

Python

Python is another option in ridge ventiliation and can be used on all kinds of roof applications. This product comes in easy to handle 20' rolls and is made from more than 90% recycled materials.

- Use under roofing, under hip/ridge shingles and as an exhaust/intake fascia vent
- Keeps attics cooler in the summer, dryer in the winter
- Helps reduce utility costs
- Non wicking and helps keep insects, dust and moisture out

* Product Specification/Testing Data is available upon request





Butyl Tape

VersaFrame Inc. offers high quality metal to metal sealing tape for sealing between panel laps and around windows, doors, roof vents, stacks, access doors and other openings.

- Supplied on easy release paper rolls for easy installation and is easily trimmable
- Provides a long lasting weather seal
- Non staining, permanently flexible

Part	Height	Width	Length
Butyl 3/8	3/32"	3/8"	45′
Butyl 1/2	3/32"	1/2"	45′
Butyl 3/4	3/32"	3/4"	45′
Butyl 1"	3/32"	1″	45′

Part/Color	Qty.
Translucent	12/box
White White	12/box

^{*} Translucent & White White available in individual tubes, custom colors available in full box quantities (12/box), with 2-3 week lead time.

Caulking

Metal roof sealant is a superior waterproof sealant that has excellent adhesion to coated metal surfaces, plastics and glass.

- Helps protect against wind, water, dust and dirt.
- Excellent adhesion to metal surfaces, plastics and glass

^{*} Product Specification/Testing Data is available upon request





Expandable Foam Tape

Expandable foam tape is the ideal filler in compression joints and is suitable for use against metal, plastic, wood and other common building materials.

- Supplied with self adhesive on one side for easy installation
- Expands a full inch, from 1/4" to 1 1/4"
- Won't dry out or extrude

Part	Height	Width	Length	Optimal for Rib Heights
X-Seal*	1.25″	1″	19.68′	1 1/4" & Less

^{*} Expanded dimensions

Part	Height	Width	Length
Universal 1x1	1″	1″	25′
Universal 1x1.5	1"	1.5"	25′
Universal 1.5x1.	5 1.5"	1.5″	25′
Universal 2x2	2"	2"	25′
Universal 1.5x1.5HD	1.5"	1.5″	25′
* 11: 1 5 :: (115)			

^{*} High Density (HD)

Universal Foam Closures

Universal foam rolls come in a range of thicknesses and lengths and are ideal for filling hip, valley and other voids in your roofing project.

- Easily cut for hassle free installation
- Typically used on sloped conditions or when standard small and large tab closures cannot be used.

^{*} Product Specification/Testing Data is available upon request











Our EPDM or silicone pipe flashing are used to seal around various pipe sizes on all roofing surfaces. The flexible base forms an excellent seal on most panel styles.

- Easy on site customization
- High resistance to UV light weathering
- 10 sizes to choose from for either standard or high temperature resistance
- Accommodates pipe sizes ranging from 1/4" diameter to 29" diameter.

Temperature Resistance (deg Cel.)

Standard HiTemp Silicone

Intermittent: 225 to -55 260 to -74 Continuous: 100 to -55 135 to -74

Edge Flashing

As an alternative to our pipe flashing products, edge flashing allows you to seal around larger pipes, chimneys, skylights and other awkward corners.

- Compatible with multiple types of building materials
- Up to 25% stretch on edges to form ideal fit and seal
- Paintable with any high quality, 100% acrylic paint after priming with an epoxy resin base primer.

Part	Pipe Diameter	
MF#1 ST or HT	1/4" to 2 1/2"	
MF#2 ST or HT	1/4" to 3"	
MF#3 ST or HT	1/4" to 5"	
MF#4 ST or HT	3" to 6-1/4"	
MF#5 ST or HT	4-1/4" to 7-1/2"	
MF#6 ST or HT	5" to 9"	
MF#7 ST or HT	6" to 11"	
MF#8 ST or HT	7" to 13"	
MF#9 ST or HT	10" to 19"	
MF#10 ST or HT	15-3/4" - 29-1/2"	

ST = Standard Roof Boot HT = High Temperature Roof Boot

Part	Length	Width
Edge Flashing Roll	10′	9″

* Product Specification/Testing Data is available upon request





Accessories

Underlayments/Tools



Synthetic Underlayment

VersaFrame Inc. offers a synthetic underlayment constructed of high strength woven fabric that is polypropylene coated on both sides.

- The specially formulated anti-slip waking surface is ashpalt free
- 2 1/2 times lighter per square foot and 25 times stronger then #15 felt
- Comes with 25 or 50 year warranty
- 180 day UV resistance

Tools

VersaFrame Inc carries hex drivers and turboshears for drilling and cutting metal roofing and siding panels. Our turboshears are highly recommended for cutting panels on site.

Part	Width	Length	Sq.Ft/roll
Hydrashell 25	48"	250′	1000 sq.ft
Hydrashell 50	48"	250′	1000 sq.ft

Tools		
Heavy Duty Turbo Shear		
1/4" Hex Driver		
5/16" Hex Driver		
3/8" Hex Driver		

 ${\it *Product Specification/Testing Data is available upon request}$



Accessories

PVC/Polycarbonate panels



PVC AG Liner Panel

PVC panels are an alternative liner package option. They can be used as wall liners in new construction, or in retrofitting or upgrading older wood lined buildings such as....

- Dairy/Hog/Poultry barns
- Riding Arenas
- Meat packaging/food processsing facilities
- Storage facilities, kennels, marinas, car washes
- 36"panel coverage with 9/16" ribs on 3" centres

Poly-Ridge lite

Poly ridge lite panels are an alternative to traditional metal ridge caps. Similar to polycarbonate panels, they allow light to pass through, directly into your building.


- 24" panel coverage
- Span: 2" on centre
- Available in 10'6" length
- Available in clear only

Polycarbonate Panel

Polycarbonate panels offer high performance glazing that stands up to punishing exterior applications. They offer multiple advantages over traditional fibreglass corrugated panels, including greater impact resistance, high light transmission, low yellowing index, high load rating and high resistance to wind uplift. Ideal for greenhouses, office partitions, canopies, carports, sunrooms, vertical glazing, metal buildings, patio covers, etc.

- 36" panel coverage
- 3/4" trapezoidal ribs on 9" centres
- Available in 16' and 20' lengths
- Available in clear only









Flatstock

Along with our numerous profiles, VersaFrame Inc. is able to offer flat stock sheets through any of our manufacturing branches. Flatstock can be ordered in any of our stock colors in 29 ga. (41" widths), 26 ga. (44.25" widths) and 24 gauge (48" widths).

FLAT SHEET AVAILABILITY (ASTM A792)							
Colour	29 ga. (41" wide)	26 ga. (44.25" wide)	24 ga. (48" wide)	Colour	29 ga. (41" wide)	26 ga. (44.25" wide)	24 ga. (48" wide)
Agalume	Υ	Υ	Y (44.25" wide & 48")	Gold	Υ	Υ	
Antique Linen	Υ	Υ		Heron Blue	Y	Υ	Υ
Burgandy	Υ			Metro Brown	Y	Y	
Black	Υ	Υ	Υ	Melchers Green	Υ	Y	Υ
Bone White	Υ	Y	Υ	Pacific Turquoise	Y	Y	
Bright Red	Υ	Υ		Regent Grey	Y	Y	Υ
Bright White	Υ	Y		Royal Blue	Υ	Y	Υ
Buckskin	Υ	Υ		Stone Grey	Υ	Y	Υ
Coffee Brown	Υ	Y	Y	Slate Blue	Υ	Υ	
Charcoal	Υ	Y	Y	Sapphire Blue	Y	Y	
Dark Brown	Υ	Y	Y	Tan	Y	Y	Y
Dark Red	Υ	Y		Tile Red	Y	Y	
Deep Water Green	Υ	Υ		Turquoise	Υ	Υ	
Forest Green	Υ	Υ		White White	Y	Y	Y

FLAT SHEET AVAILABILITY (ASTM A653)			
	29 ga. (41" wide) 18 ga. (48" wide)		
Galvanized (G90)	Υ	Υ	

Call your nearest branch for availability on flat products.

